


Oil S&D 10 Bar

FLAT CORRUGATED



TUBE : OIL AND PETROL RESISTANT BLACK NBR.
 REINFORCEMENT : HIGH TENSILE SYNTHETIC TEXTILE, STEEL WIRE HELIX AND ANTISTATIC COPPER WIRE.
 COVER : OIL, WEATHER, OZONE, ABRASION AND SEA WATER RESISTANT, FLAT-CORRUGATED, SPECIAL SYNTHETIC RUBBER.
 APPLICATION : FOR SUCTION AND DISCHARGE OF PETROLEUM PRODUCTS WITH AROMATIC CONTENT UP TO 50%.

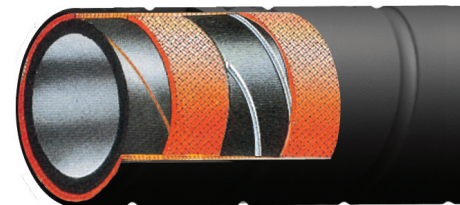

SEELE : ÖL- UND KRAFTSTOFFBESTÄNDIG, NITRILGUMMI, SCHWARZ.
 EINLAGE : HOCHZUGFESTE SYNTHETISCHE TEXTILEINLAGE, STAHLDRAHTSPIRALE UND ANTISTATISCHER KUPFERLITZE.
 DECKE : ÖL-, OZON- UND WITTERUNGSBESTÄNDIG, ABRIEBFEST, SPEZIELL SYNTHETISCHER GUMMI, LEICHT GEWELLT, GEEIGNET FÜR EINSATZ IM SALZHALTIGEN WASSER.
 ANWENDUNG : SAUG UND DRUCKSCHLAUCH FÜR MINERALÖLPRODUKTE MIT MAX. 50 % AROMATENGEHALT.



SOTTOSTRATO : GOMMA NBR NERA, RESISTENTE AI PRODOTTI PETROLIFERI.
 RINFORZO : INSERZIONI TESSILI AD ALTA TENACITÀ CON SPIRALE D'ACCIAIO E CORDICELLA DI RAME ANTISTATICA.
 COPERTURA : GOMMA SPECIALE NERA ONDULATA PIATTA, RESISTENTE AGLI OLI, ALL'OZONO, ALL'ABRASIONE, AGLI AGENTI ATMOSFERICI ED ALL'ACQUA DI MARE.
 IMPIEGO : PER ASPIRAZIONE E MANDATA DI PRODOTTI PETROLIFERI CON CONTENUTO AROMATICO FINO AL 50%.



TUBE : CAOUTCHOUC NBR, NOIR, RESISTANT AUX HUILES ET AUX HYDROCARBURES.
 RENFORCEMENT : INSERTION TEXTILE HAUTE TENACITE, SPIRALE EN ACIER ET FIL DE MASSE ANTISTATIQUE..
 REVETEMENT : CAOUTCHOUC SYNTHETIQUE SPECIAL ONDULE PLAT, RESISTANT AUX HUILES, A L'ABRASION, A L'OZONE, AUX AGENTS ATMOSPHERIQUES ET A L'EAU DE MER.
 APPLICATION : POUR ASPIRATION ET REFOULEMENT D'HYDROCARBURES A TENEUR EN AROMATIQUES JUSQU'A 50%.

ID		OD		WP		BP		VACUUM	BR/r	W	L
inch	mm	mm	mm	bar	psi	bar	psi	bar	mm	g/m	m
3/4"	19	29	10	150	30	450	-0.92	65	463	40-46-61	
1"	25.4	36	10	150	30	450	-0.92	85	614	40-46-61	
1 1/4"	32	43	10	150	30	450	-0.92	110	852	40-46-61	
1 1/2"	38	49	10	150	30	450	-0.92	130	993	40-46-61	
2"	50.8	63	10	150	30	450	-0.92	175	1499	40-46-61	
2 1/2"	63.5	77	10	150	30	450	-0.92	210	2096	40-46-61	
3"	76.2	90	10	150	30	450	-0.92	250	2571	40-46-61	
4"	101.6	117	10	150	30	450	-0.92	360	3820	40-46-61	
5"	127	145	10	150	30	450	-0.80	480	6190	40-46-61	
6"	152.4	172	10	150	30	450	-0.80	600	8621	40-46-61	
8"	203.2	225	10	150	30	450	-0.80	900	12425	30	

OPTIONS / OPTIONEN / OPZIONI / OPTIONS



Tube upon request : Conductive (Ω)
 Seele nach Anfrage : Leitfähig (Ω)
 Sottostrato su richiesta : Conduttiva (Ω)
 Tube sur demande : Conducteur (Ω)



-30°C / + 70°C
 -22°F / +158°F

MARKING / BESCHRIFTUNG / MARCATURA / MARQUAGE: **TRANSFER TAPE OR EMBOSSED**



NORMS NORMEN NORME NORMES	ISO 1307	COLOUR FARBEN COLORI COULEUR	 
------------------------------------	----------	---------------------------------------	---